


EXTENDABLE

GOOSENECK



LeciTrailer

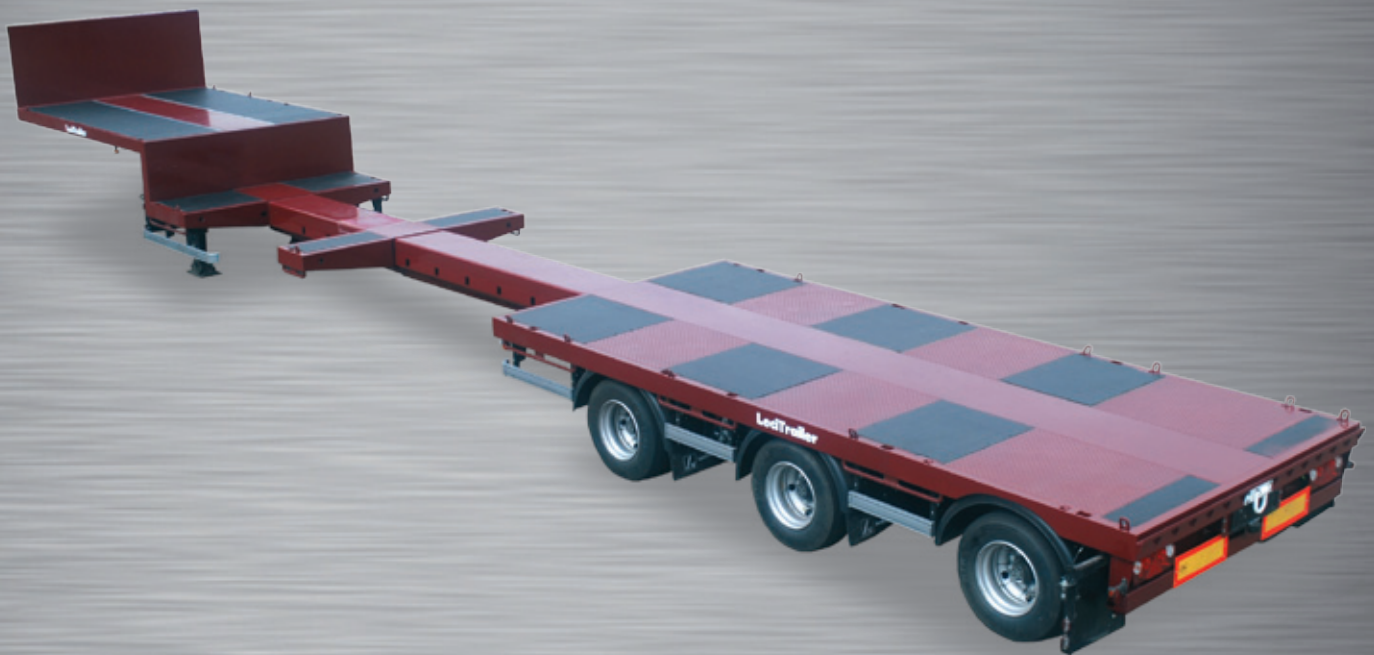

DIMENSIONS

- **Length:** 12.350 mm. Extendable up to 18.600 mm.
- **Width:** 2.550 mm.
- **5th Wheel Height:** 1.150 mm. to 1.250 mm
- **Neck Height:** 660 mm.
- **King-pin distance to front:** 750 mm.

STRUCTURE

- Longitudinal varying profile tubular section made of high yield strength steel.
- Double section neck 250 mm. As per ISO 1726.
- Tubular telescopic structure, with pneumatical extension blocking.
- High yield strength steel crossmembers at 400mm distance.
- Hot laminated side rails with 11 pars rope hooks rims (2 Tons).
- Aluminium rear bumper.
- 2 speed reinforced mechanical landing legs.

AXLES/SUSPENSION

- 3 axles with drum brakes.
- Pneumatical suspension with 5 ways valve.
- 12 tyres 235/75 R 17,5.
- ABS 2S/2M.
- CE homologated 2 circuits brake installation.
- Pneumatical actuators parking brakes.

ELECTRICAL INSTALLATION

- ISO coupling heads with filter.
- ADR 24 V armoured electrical installation.
- 3 ISO connectors: 2 of 7 poles (24N y 24S) and 1 of 15 poles.
- 7 services optical group with registration plate support.
- Rear gear bipper.
- LED yellow side lights. 3rd brake light.

FINISHINGS

- Shot blasted metallic structure (SA21/2).
- Prime finishing Epoxy (2 components).
- Acrylic-polyurethane coating (2 components).
- RAL color to be chosen.

EQUIPMENT

- 30mm. Thickness plywood floor.
- Mudguard system as per actual regulation.
- 1.500 or 2.000 mm. front wall height.
- Foldable cyclist side protection.
- Long vehicle plates.
- Wheel keys.

OPTIONAL EQUIPMENT

- Brake pads usage advisor.
- Self steering axle.
- Axle lifter.
- Hubodometer.
- Aluminium rims.
- EBS + RSS.
- Parking sensor.
- Pressure load control.
- Extra spare wheel support.
- Plain wood, 34mm thickness, with galvanized omegas.
- Flat plate steel floor 4 mm.
- Chequered plate steel 4/6 mm.
- Container tiwst-locks.
- Stanchions pockets.
- Winches and hooks for goods tightening.
- PVC tool box.
- Fire-Extinguisher box.
- Fire- Extinguisher 6kgs.
- 30 liters water tanks.
- Exceptiona transport kit.
- Ramps rear profile.

